

1/24

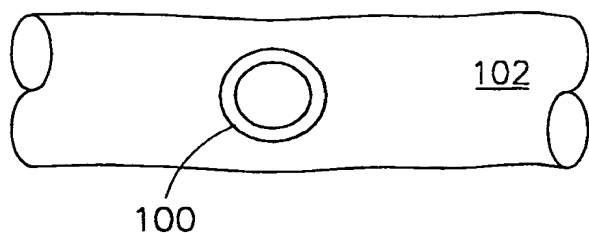


FIG. 1A

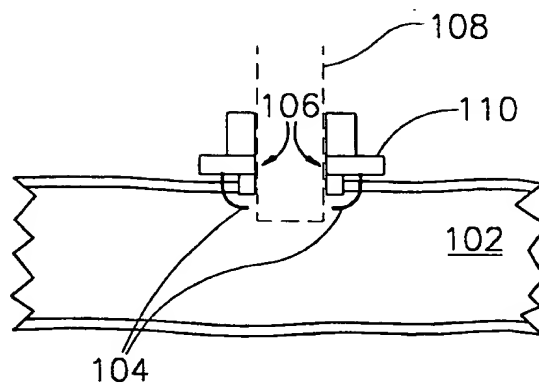


FIG. 1B

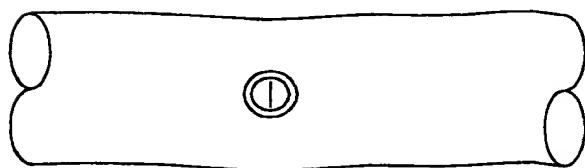


FIG. 1C

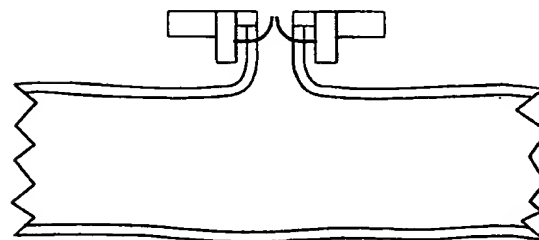


FIG. 1D

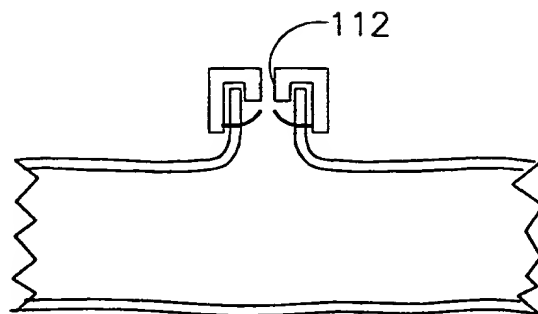


FIG. 1E

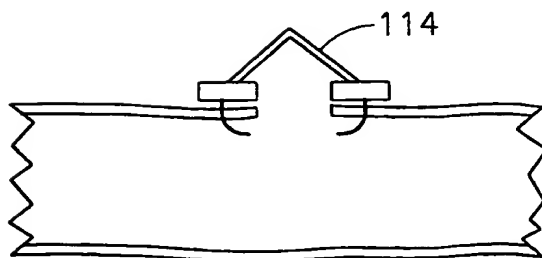


FIG. 1F

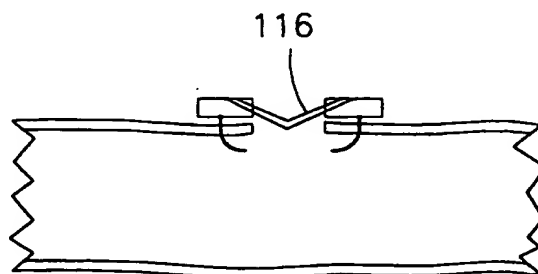


FIG. 1G

0936789 001704

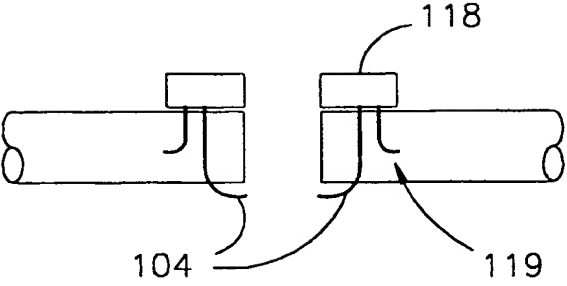


FIG. 1H

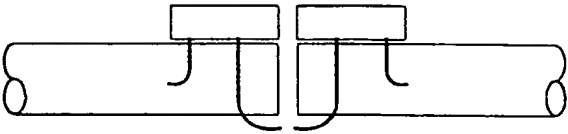


FIG. 1I

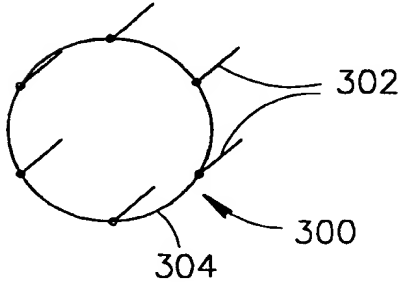


FIG. 1J




FIG. 1K

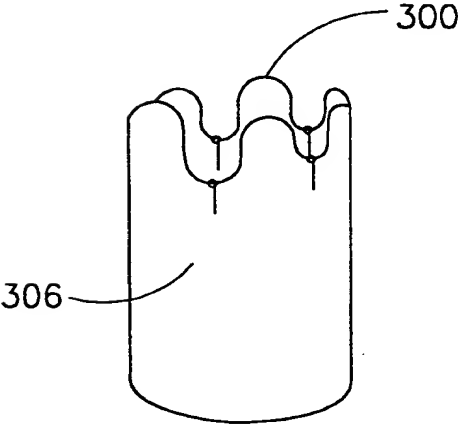


FIG. 1L

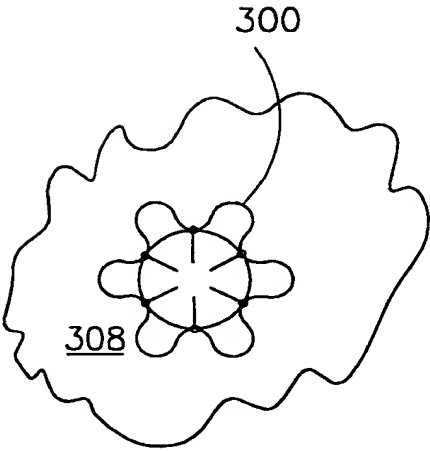


FIG. 1M

09/736789-68/9660

3/24

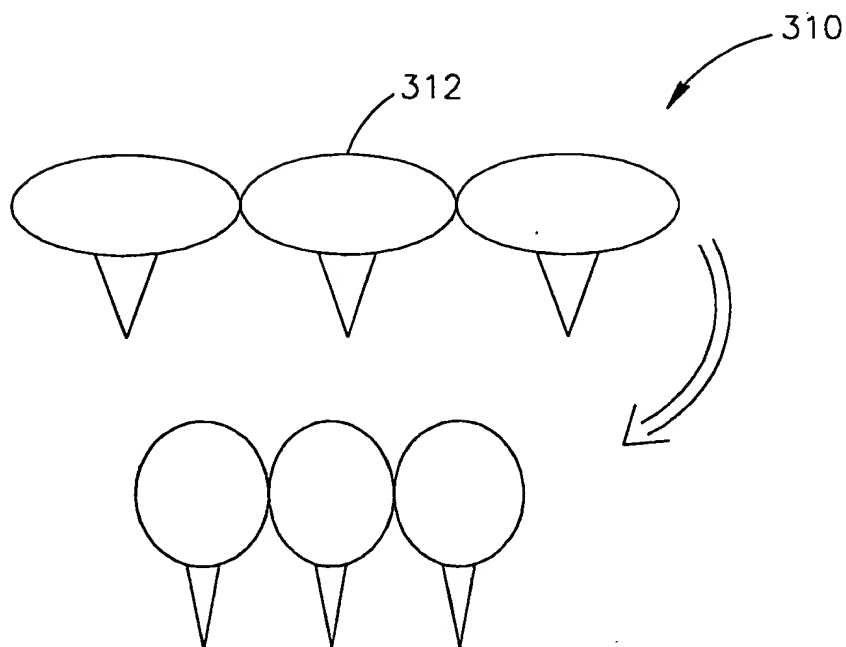


FIG.1N

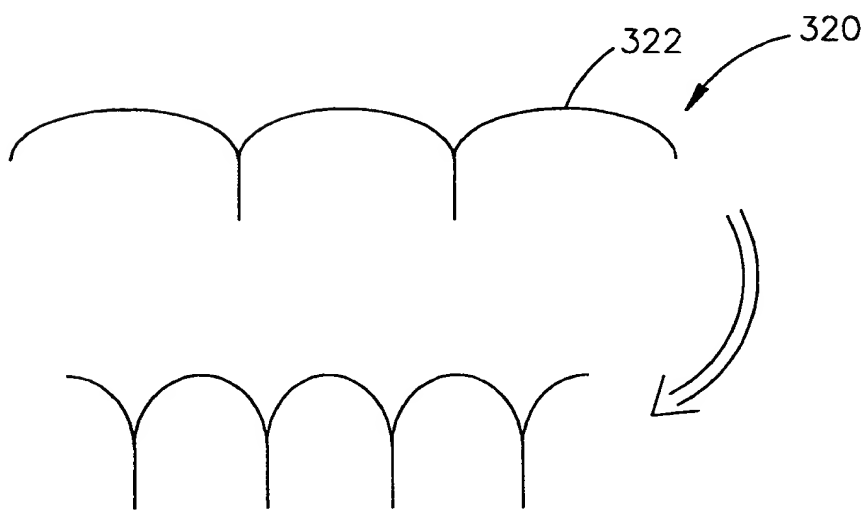


FIG.10

FIG. 10 10/10/2000

4/24

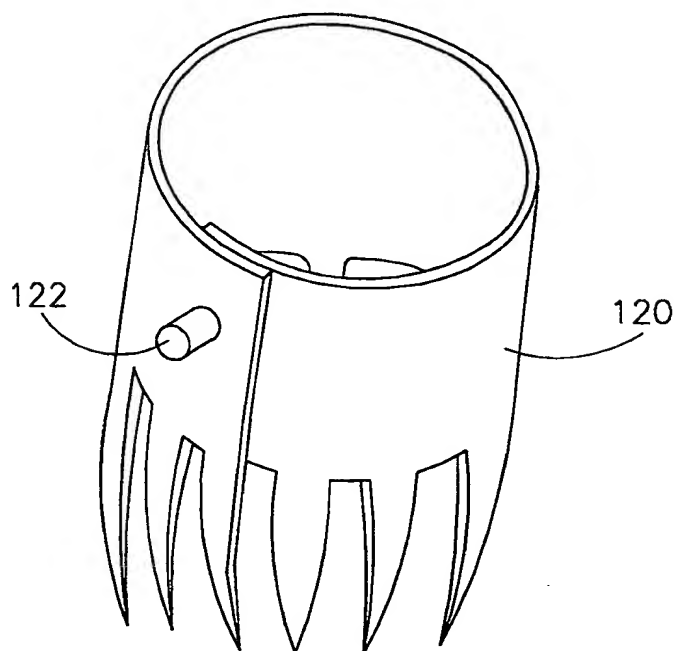


FIG. 2A

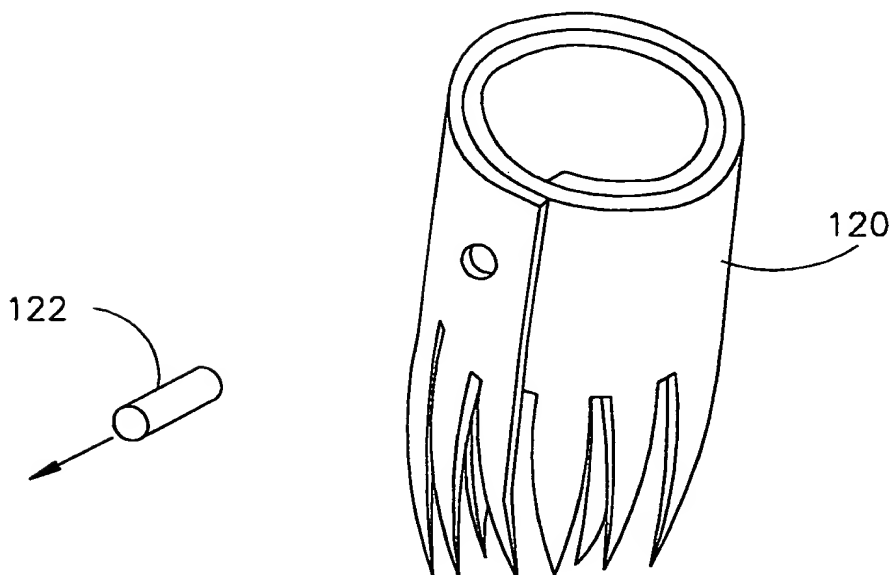


FIG. 2B

T02760 6829E660

5/24

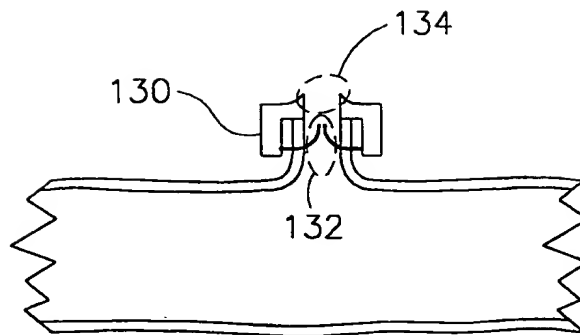


FIG. 3

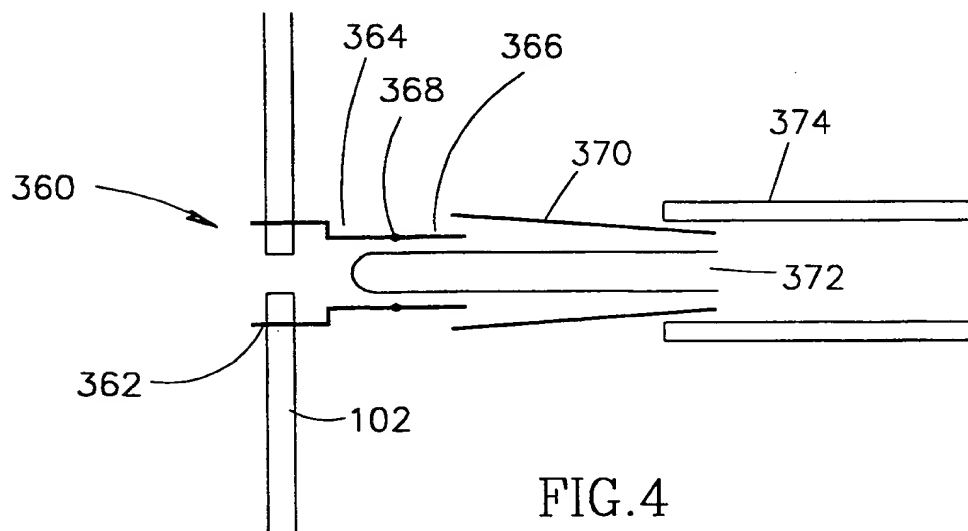


FIG. 4

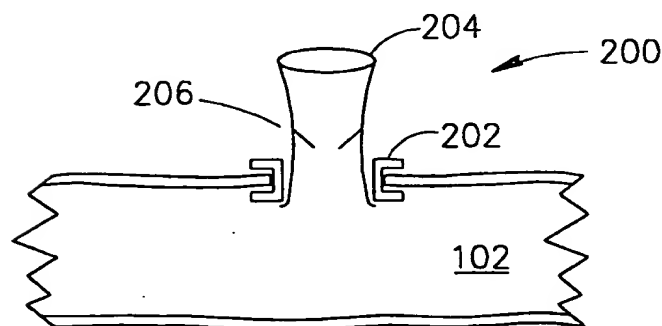


FIG. 5

0936789.09101

6/24

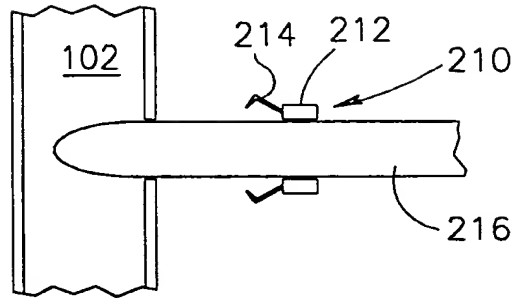


FIG. 6A

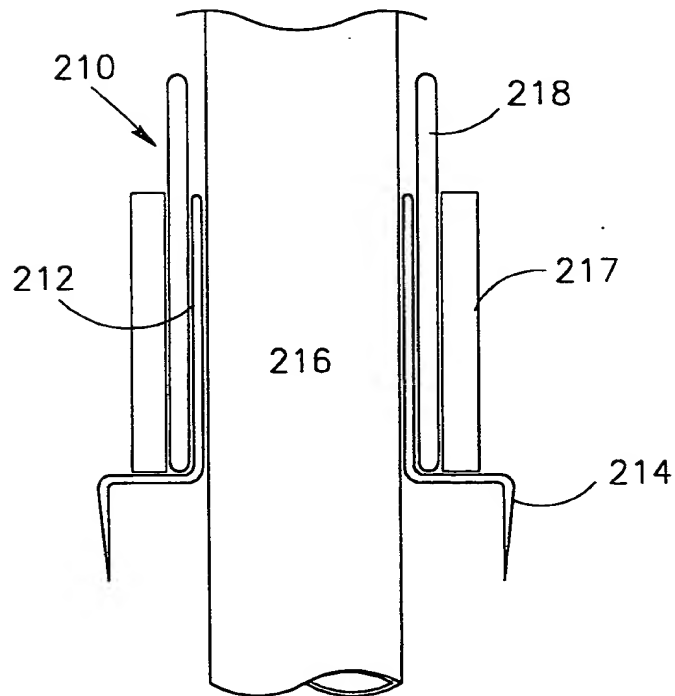


FIG. 6B

0936789.0910  
T.D/T.60" 68/9E660

7/24

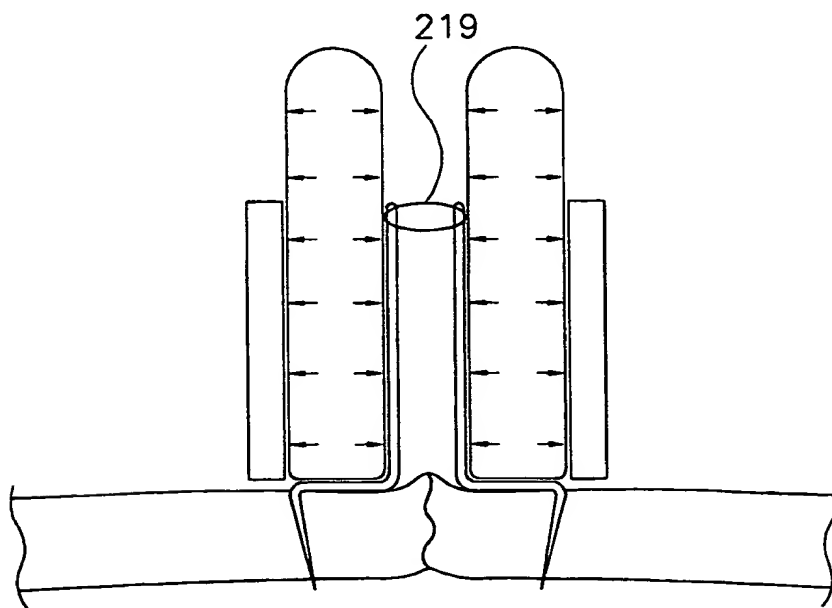
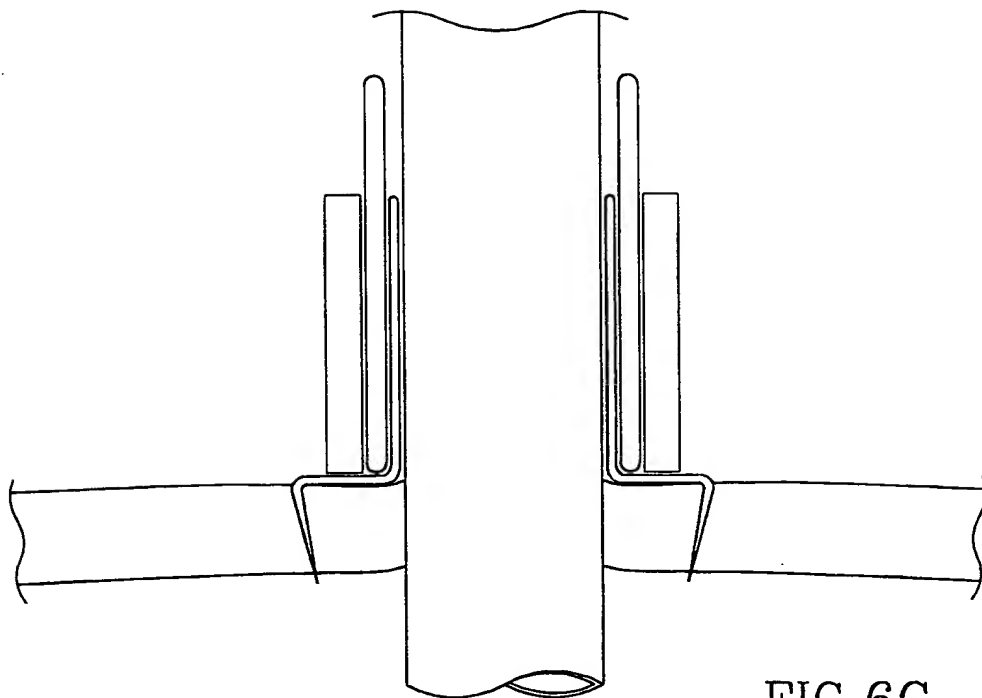


FIG. 6C

8/24

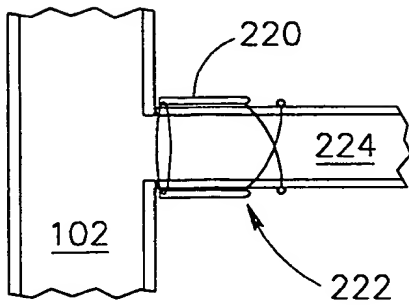


FIG. 7

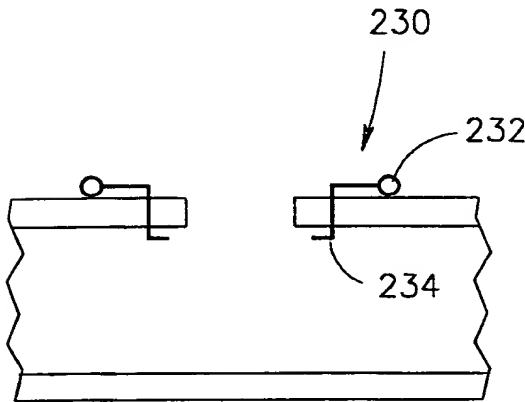


FIG. 8A

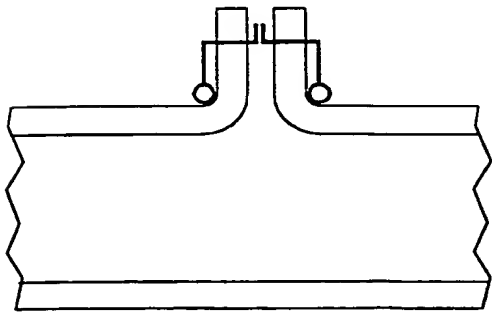


FIG. 8B

09/06789 8/24



9/24

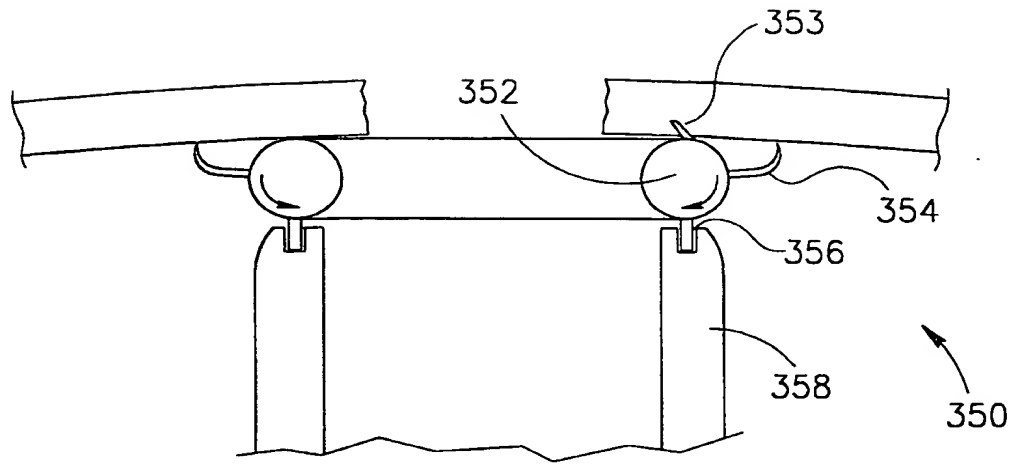


FIG. 8C

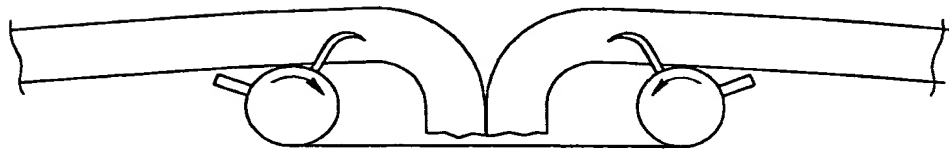


FIG. 8D

0936789 00674

10/24

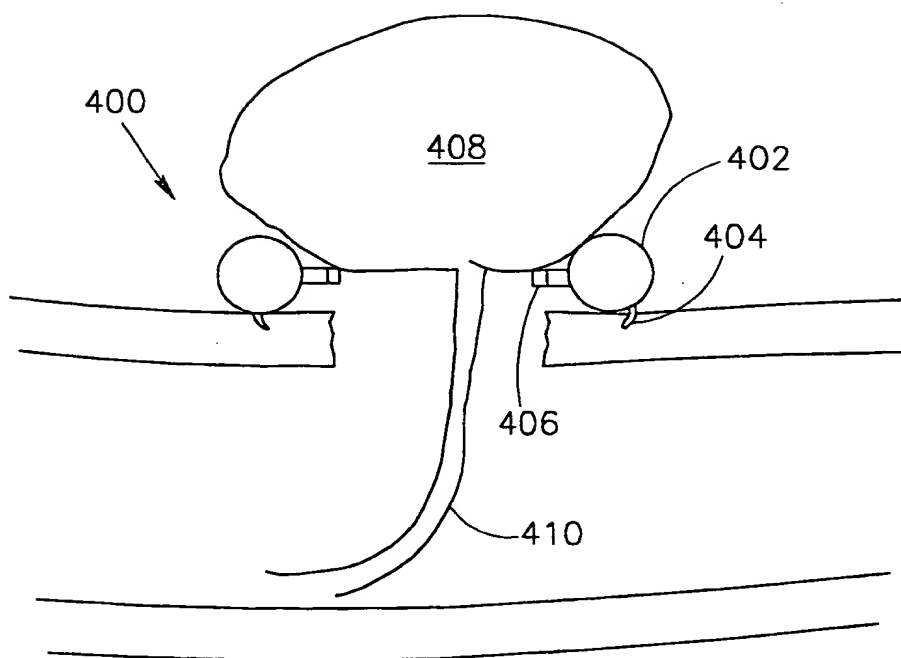


FIG. 8E

0936788-09101

11/24

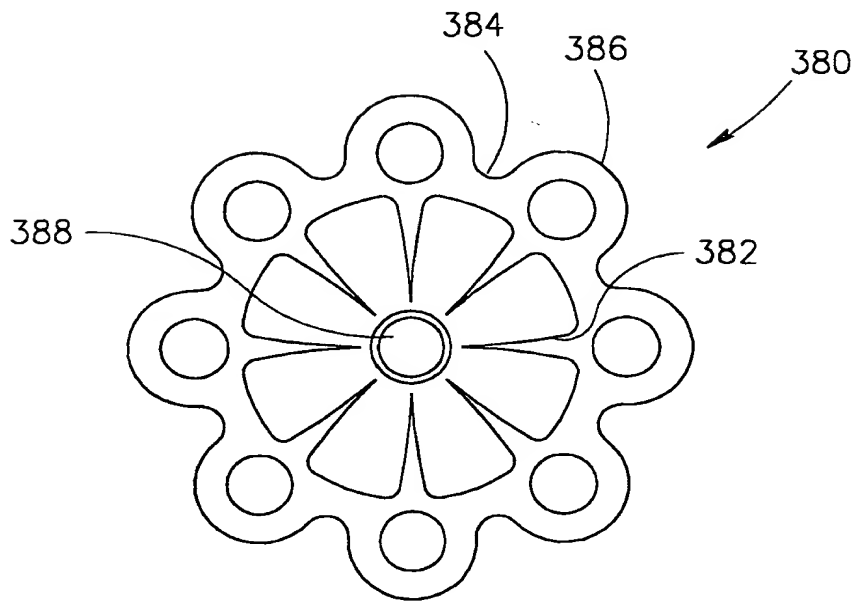


FIG. 9A




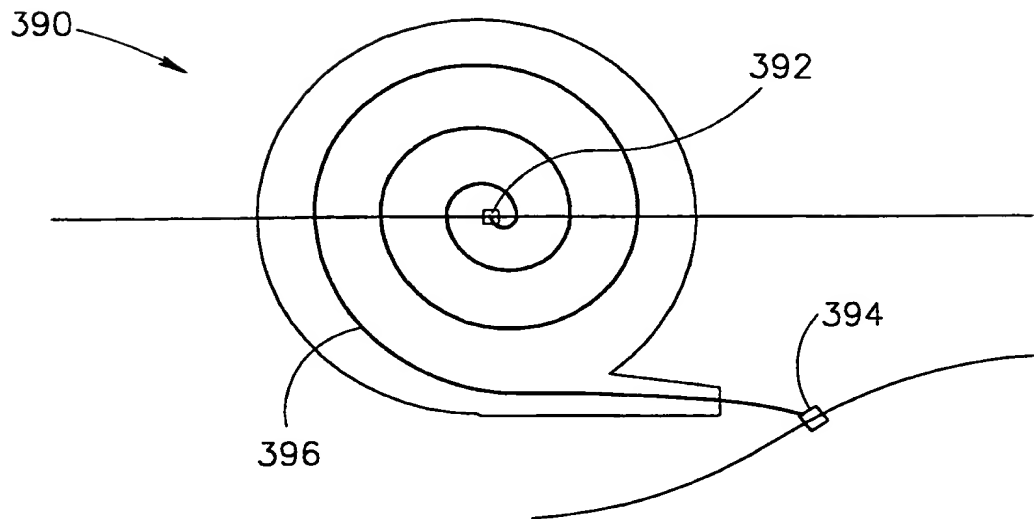


FIG. 9B

FIG. 9A

12/24

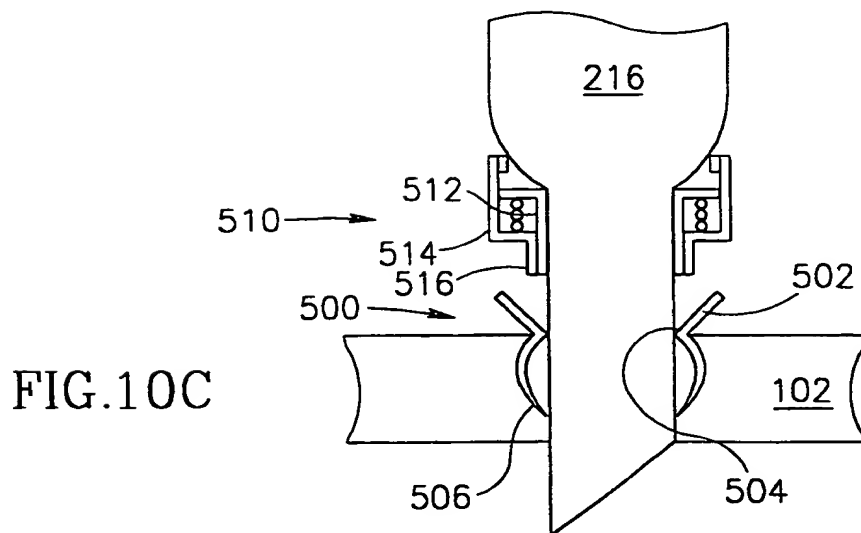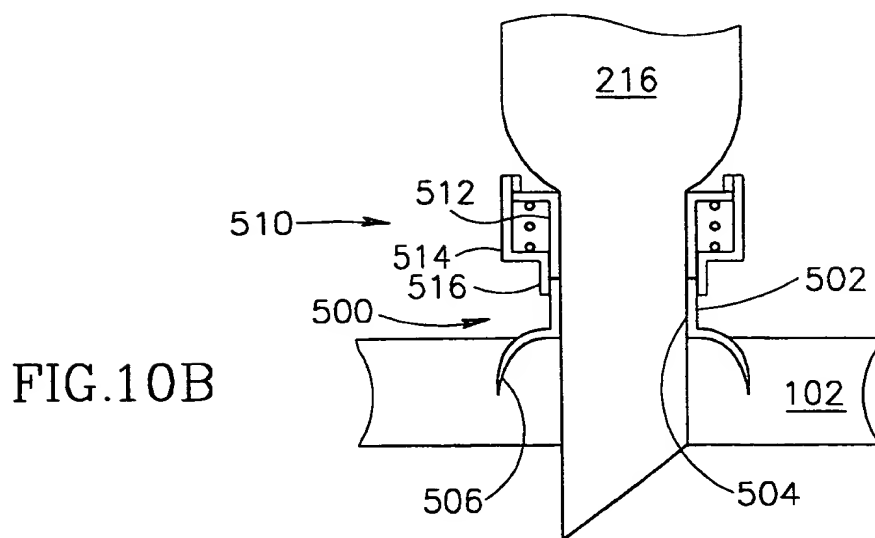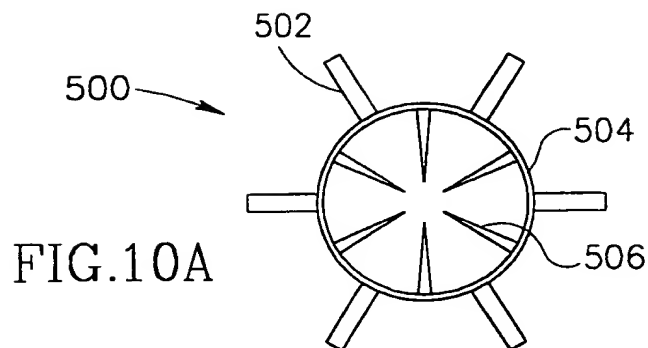

10/2160-68/9660

13/24

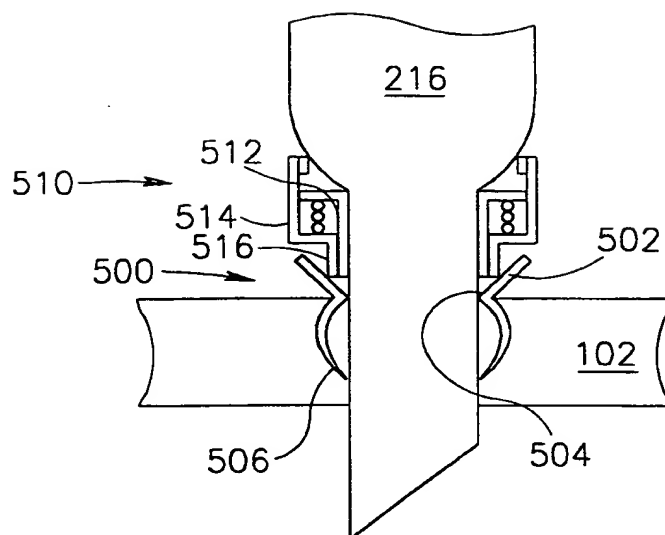


FIG. 10D

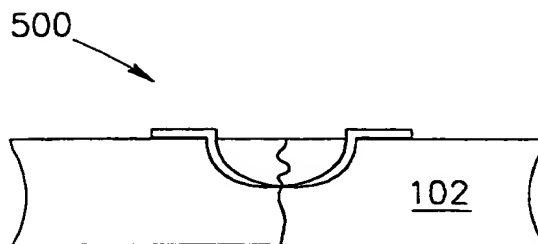


FIG. 10E

FIG. 10D

14/24

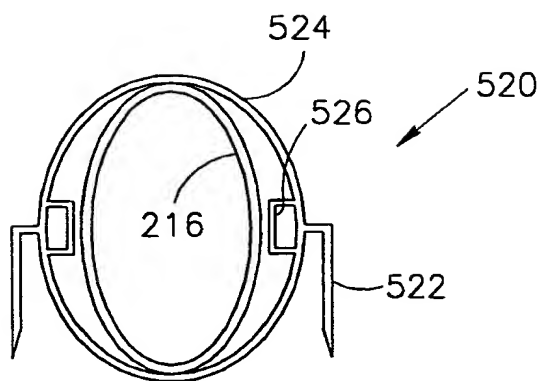


FIG. 11A

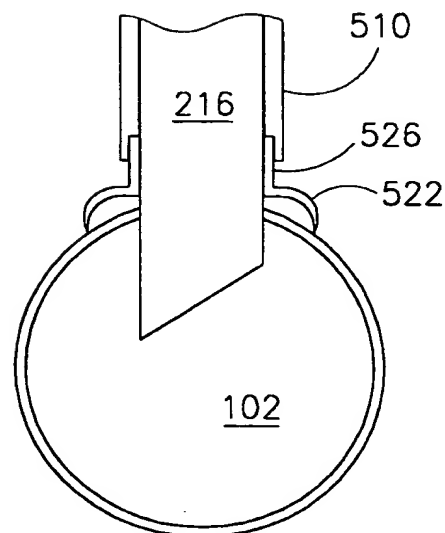


FIG. 11B

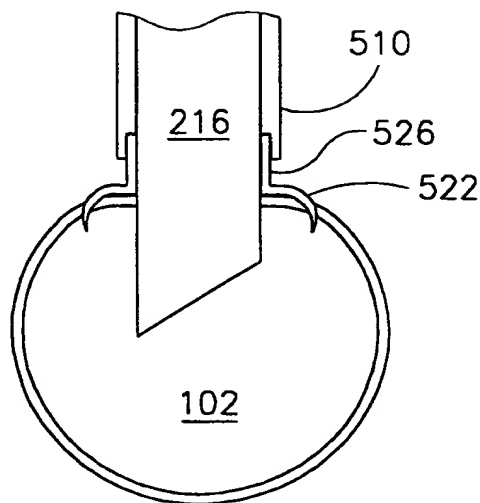


FIG. 11C

104760" 68292650

15/24

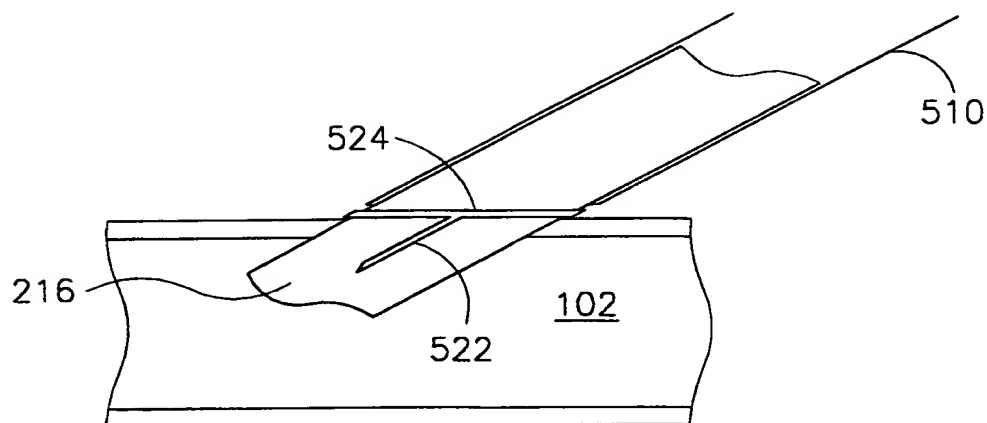


FIG.11D

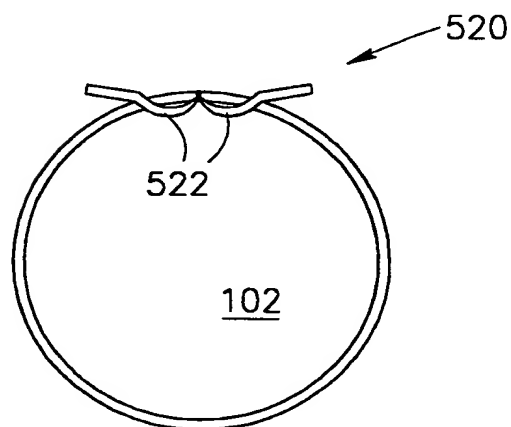


FIG.11E

FIG. 11D

16/24

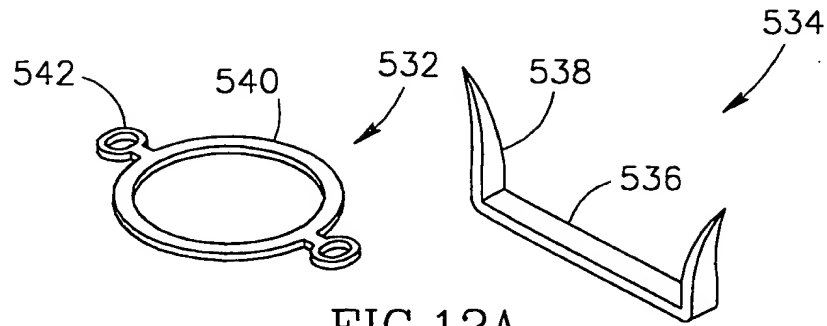


FIG. 12A

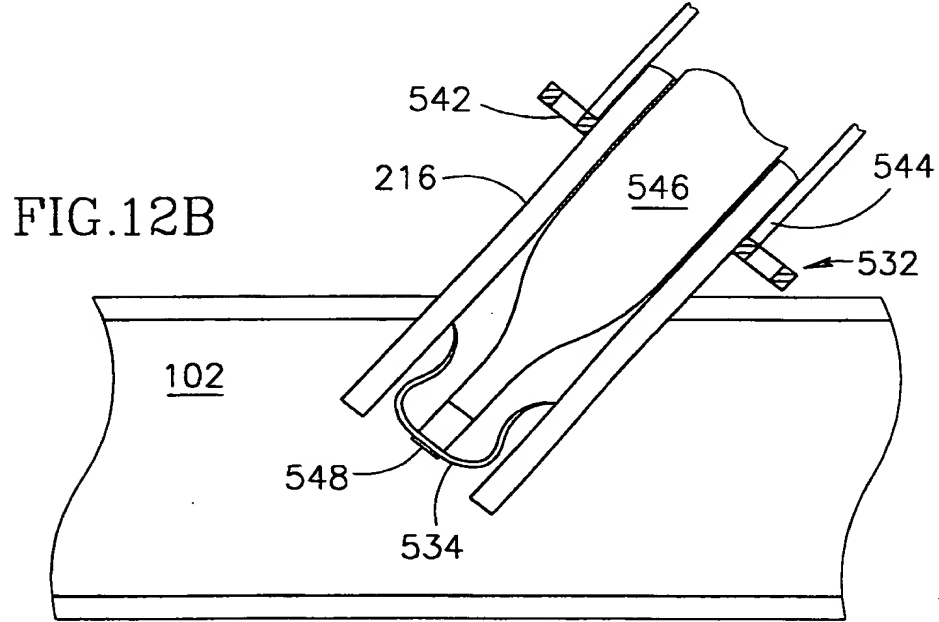


FIG. 12B

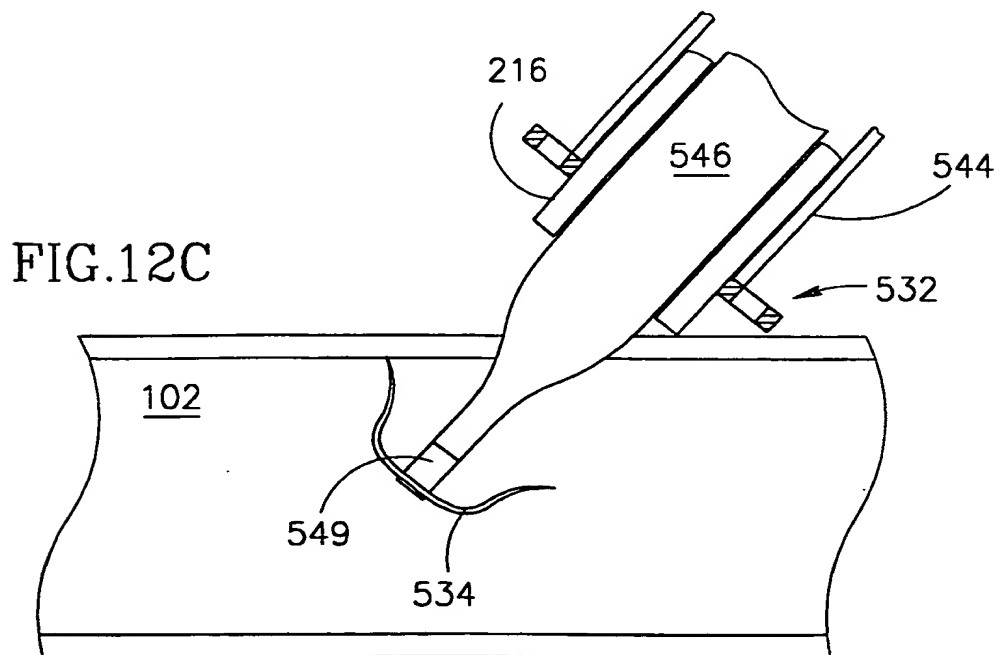


FIG. 12C

FIG. 12A



17/24

FIG.12D

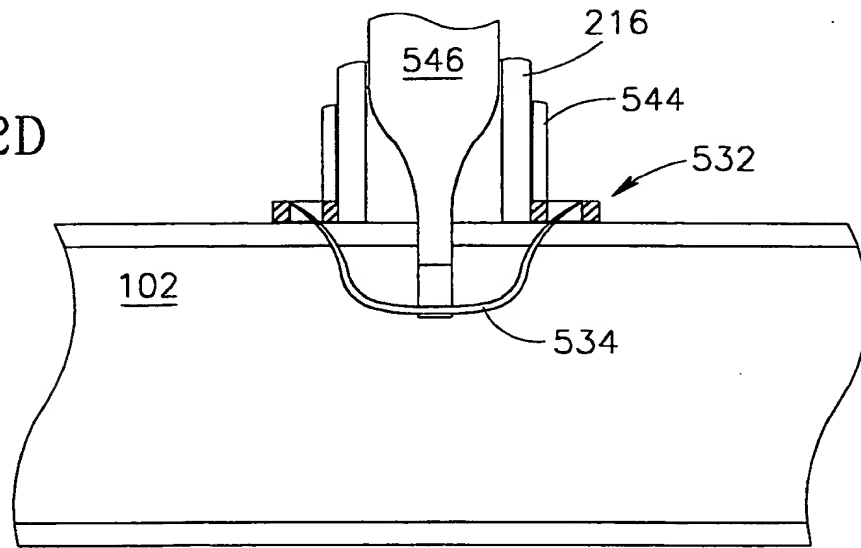


FIG.12E

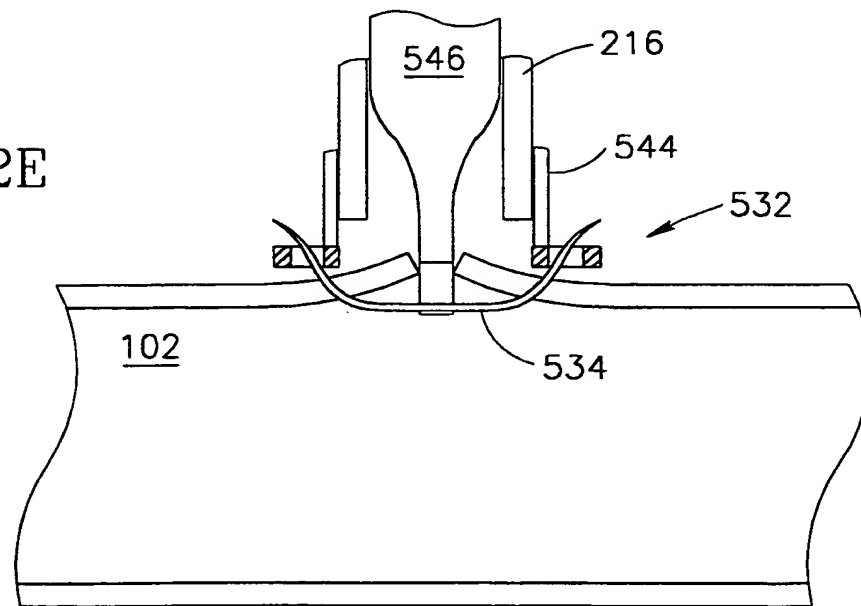


FIG.12F

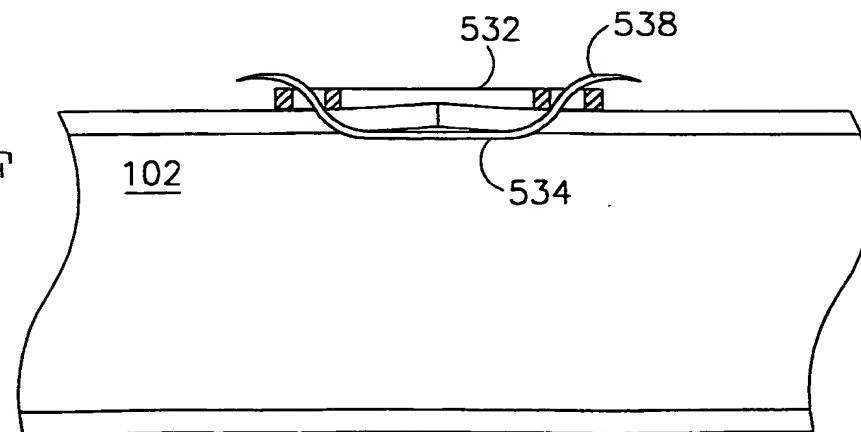


FIG. 12D

18/24

FIG.13A

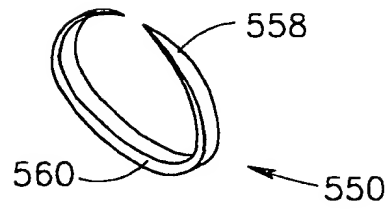


FIG.13B


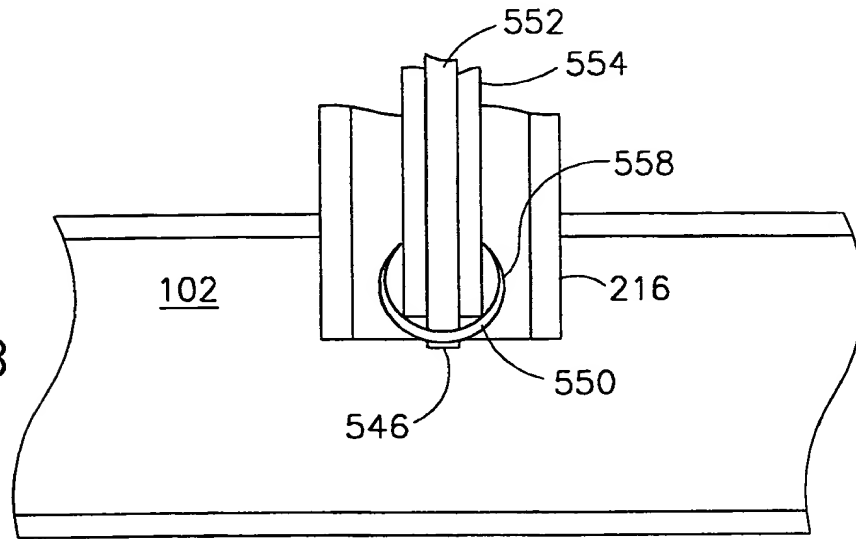


FIG.13C

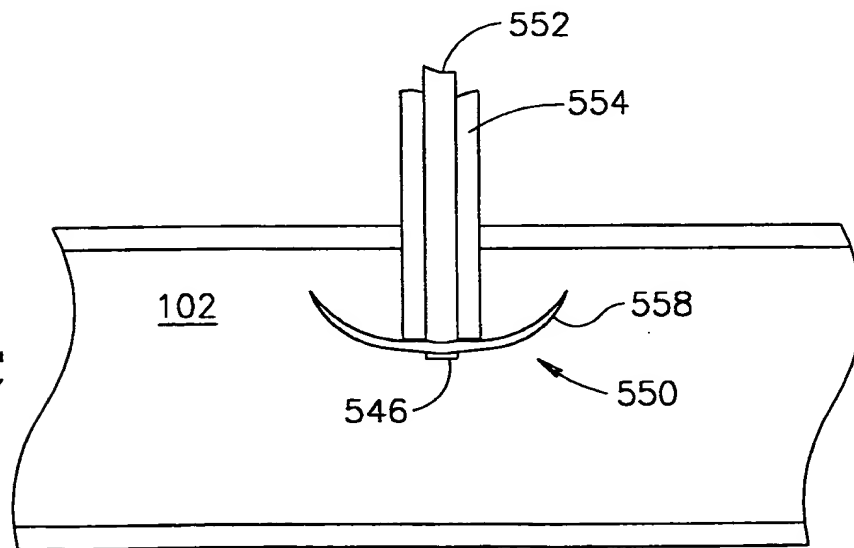

102160 68292660

A cross-sectional view of a device. A curved base, labeled 546, is positioned on a surface labeled 102. Three vertical elements, labeled 552, 554, and 558, are mounted on the base. An arrow labeled 550 points to the base. The surface 102 is shown as a horizontal line with a wavy bottom edge.

A cross-sectional view of a device. A horizontal layer, labeled 102, is shown. A ring-shaped component, labeled 550, is positioned on top of this layer. The ring has a central opening and is divided into two halves by a vertical line. A label 558 points to the top edge of the ring.

FIG.13E

20/24

FIG.14A


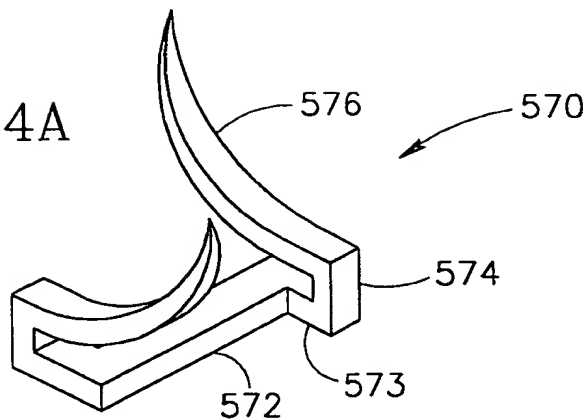


FIG.14B

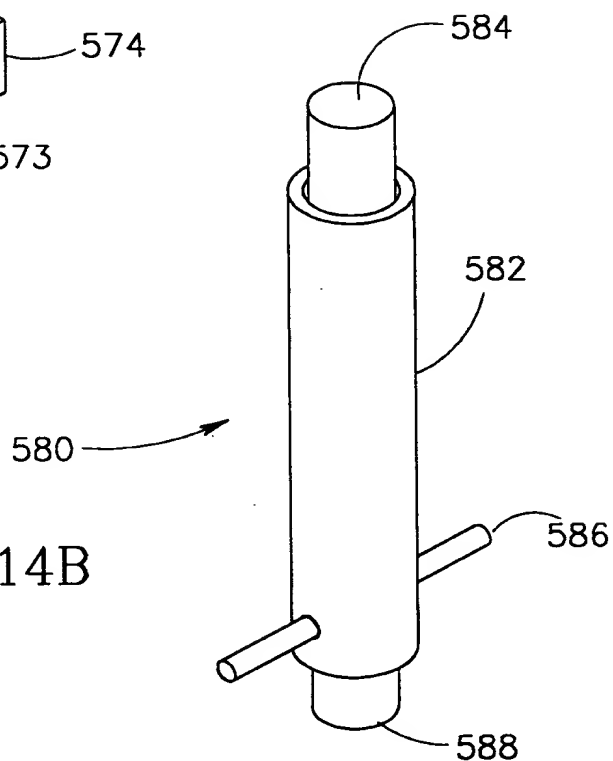

570 →

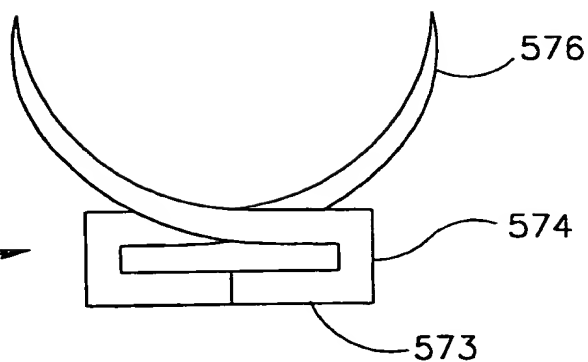


FIG.14C

FIG. 14A, 14B, 14C

21/24

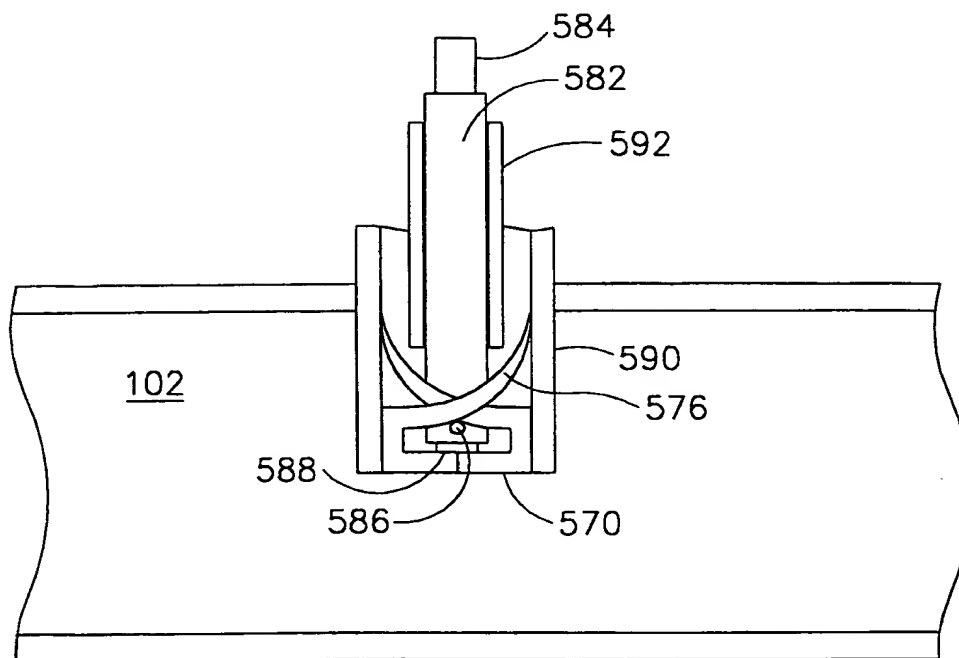


FIG.15A

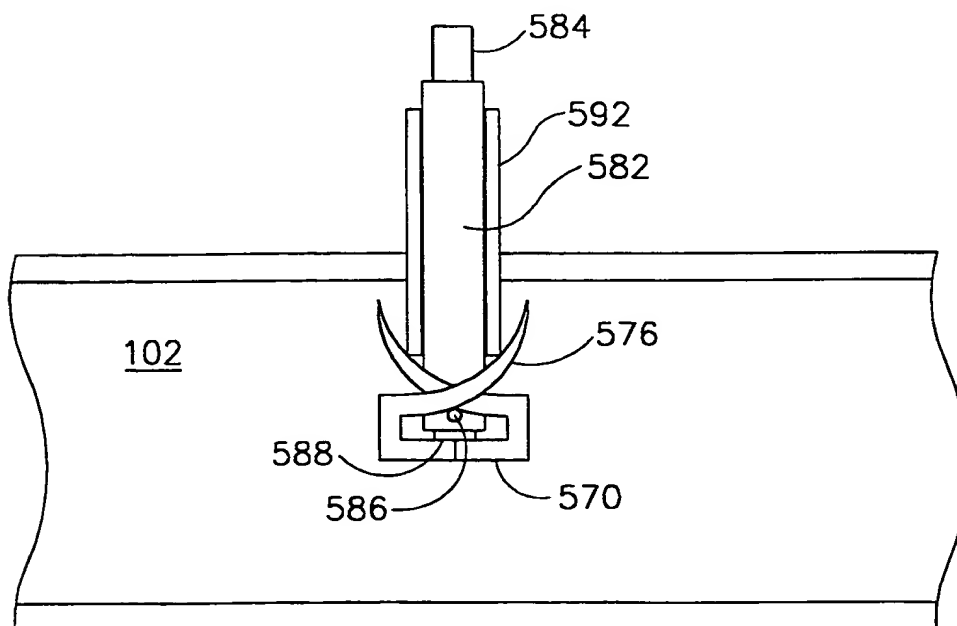


FIG.15B

FIG. 15A

22/24

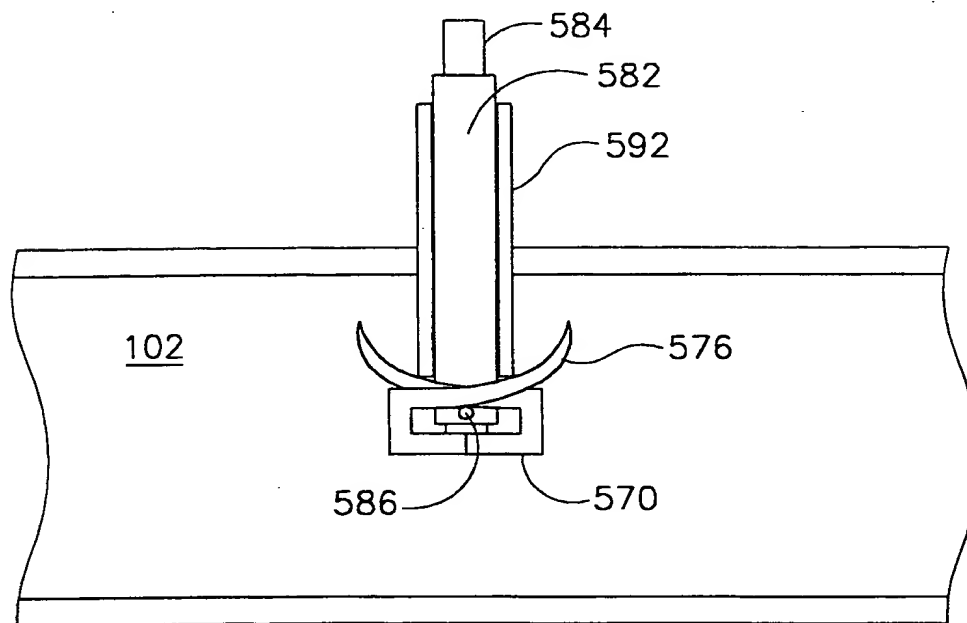


FIG.15C

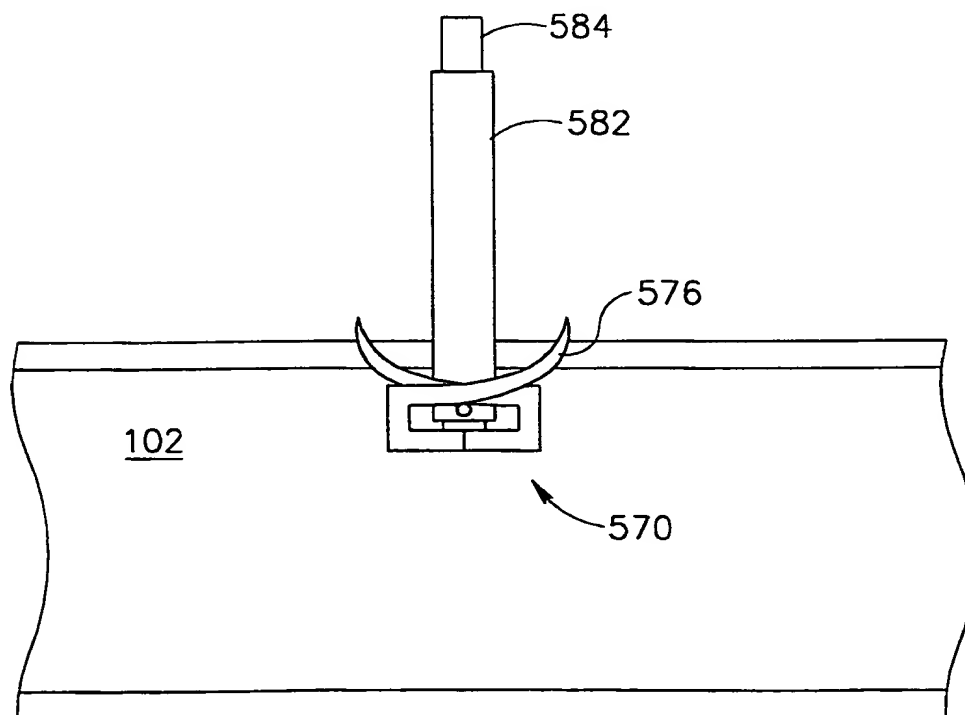


FIG.15D

FIG. 15C

23/24

FIG.15E

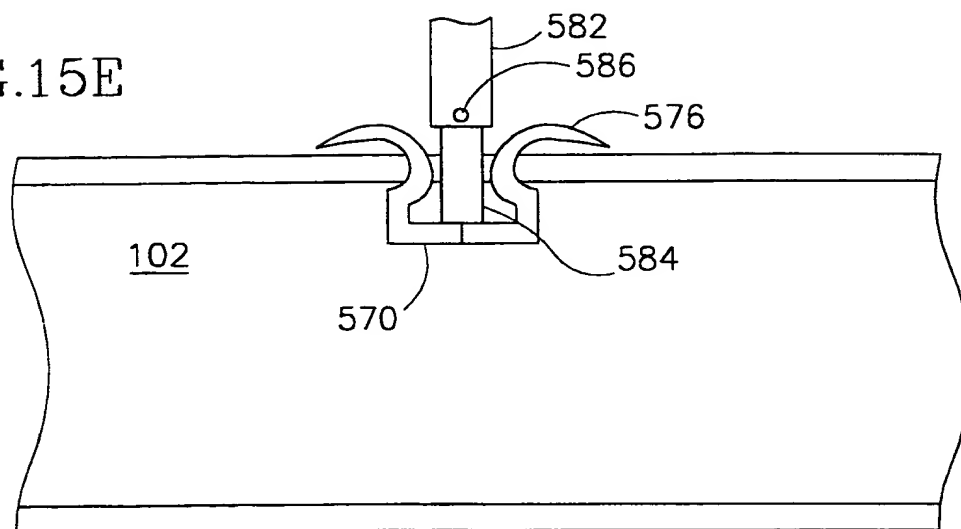


FIG.15F

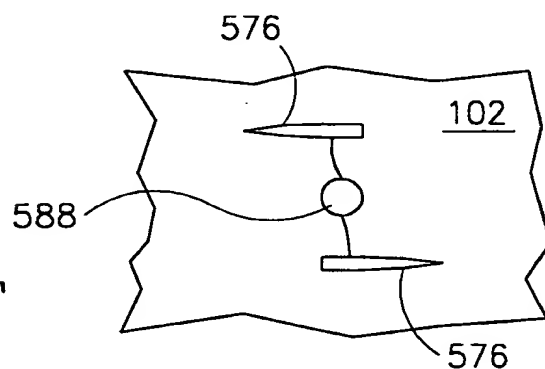


FIG.15G

